



# Cat<sup>®</sup>

## AP655F PAVER

### W/MOBIL-TRAC<sup>™</sup> UNDERCARRIAGE

#### FEATURES:

##### HIGH RETURN ON INVESTMENT

- Exclusive, integrated 70 kW generator designed for long life by the same team that developed the D7E electric drive track-type tractor
- Fast heating screed leads to more daily production, heating time in as little as 15 minutes
- Mobil-Trac<sup>™</sup> undercarriage limits tow-point movement for excellent paving results
- Exclusive air flow design improves operating conditions for the crew and keeps components cooler for lasting durability
- Higher resale value: long-life components, and latest engine emissions technology

##### TECHNOLOGY THAT WORKS FOR YOU

- Exclusive screed heating system monitors elements for failure conditions, eliminates unnecessary replacement
- Cat<sup>®</sup> Grade and Slope option integrated in the tractor and screed displays for optimized operator efficiency
- Propel and feeder system settings transfer between stations with a single switch; Cat exclusive
- Auto-fill feeder system simplifies setup
- Single touch feeder system activation optimizes efficiency
- Automated travel feature; augers and hydraulic mainframe extensions raise with the screed, preventing damage during transport
- Product Link<sup>™</sup> remotely monitors machine location, daily hours of operation, fuel consumption, fault codes, and preventative maintenance status, for optimal machine support

##### HIGH QUALITY RESULTS, HIGHER EARNINGS

- SE50-Series and SE60-Series screeds deliver excellent ride, density, and mat texture while providing superior adjustment, available with Tamper-bars and vibration or vibration only
- Tow-point utilizes exclusive linkage design for optimal screed flotation
- Exclusive 2-speed proportional control on the screed extenders

##### LOW OWNING AND OPERATING COSTS

- Exclusive Eco-mode and Automatic Engine Speed Control reduce fuel consumption and lower sound levels for better comfort and communication
- 4-pump feeder system is designed for high production in Eco-mode, leads to lower fuel consumption
- Million cycle switches provide reliability
- Conveyor bed plates and chain guards designed to minimize labor requirements and provide lower cost replacement
- Heating elements slide-out for easy replacement
- Machined screed frames simplify screed plate replacement

##### UNMATCHED AFTER-THE-SALE SUPPORT

- Strategically located dealers with 24/7 support
- In-the-Iron service training for technicians
- Paver Operator Training helps maximize machine performance
- Project consulting helps improve technique and job site management

#### Specifications:

##### Engine – Powertrain

Cat C4.4 ACERT<sup>™</sup> Engine\* 129 kW 175 hp (M), 173 hp (I)

\* Engine meets U.S. EPA Tier 4 Final/EU Stage IV emission standards.

Cat C7.1 Engine\*\* 151 kW 205 hp (M), 202 hp (I)

\*\* Engine meets emissions equivalent to U.S. EPA Tier 3, EU Stage IIIA, and China Stage III requirements.

Engine speed - maximum/minimum 2200/1000 rpm

Eco-mode 1650 rpm

Screed heating - standard width (Quiet) 1300 rpm

Screed heating - w/extensions (Quick) 1300 to 2200 rpm

##### Speed ranges:

Paving 64 fpm 210 fpm

w/Tamper-bar screed 25 fpm 82 fpm

Travel 14.5 km/hr 9 mph

##### Weights

AP655F Paver only - shipping 15 297 kg 34,725 lb

AP655F Paver only - operating 15 584 kg 34,356 lb

*Operating weight includes full fuel tank and 75 kg (165 lb) operator.*

SE50 V Screed only 3284 kg 7,239 lb

SE50 VT Screed only 3490 kg 7,695 lb

SE60 V Screed only 3400 kg 7,495 lb


SE60 V XW Screed\*\*\* only 4070 kg 8,973 lb

SE60 VT XW Screed\*\*\* only 4532 kg 9,991 lb

*\*\*\* Not available on the AP655F for the U.S. market.*



## Paver Specifications

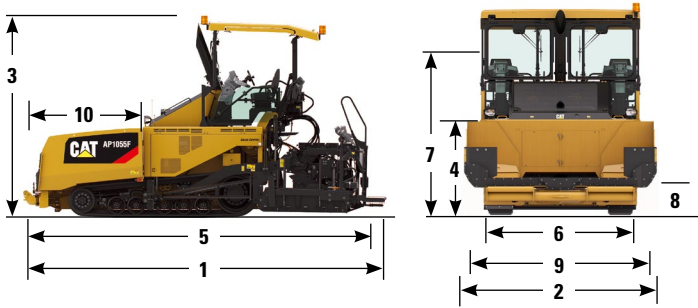

### Dimensions:

<b>1</b>	Operating length with SE50 V	6829 mm	22' 5"
	Operating length with SE50 VT	6829 mm	22' 5"
<b>5</b>	Transport length with SE50 V, SE50 VT	6720 mm	22' 1"
	Transport length with SE60 V XW, SE60 VT XW	6910 mm	22' 8"
<b>3</b>	Operating height with canopy (top of beacon)	3889 mm	12' 9"
	Operating height without canopy	3777 mm	12' 4"
<b>2</b>	Operating width	3306 mm	10' 10"
<b>4</b>	Operating deck height	1792 mm	5' 10"
	Truck entry height - manual apron	529 mm	21"
<b>8</b>	Truck entry height - hydraulic apron	521 mm	21"
	Truck entry width	3194 mm	10' 6"
<b>7</b>	Transport height - canopy retracted	3056 mm	10'
	Transport height - without canopy	2929 mm	9' 7"
<b>6</b>	Transport width - w/SE50 w/endgates	2756 mm	9' 1"
	Transport width - w/SE50 w/endgates folded	2550 mm	8' 4"
<b>9</b>	Truck entry width	3194 mm	10' 6"
	Hopper length with push-roller - minimum	2215 mm	7' 3"
<b>10</b>	Hopper length with push-roller - maximum	2414 mm	7' 11"

### Optional Equipment

- Air-ride Seat w/Heat
- Auger and Mainframe Extensions
- Ballast (front bumper)
- Cat Grade Controls
- Decelerator Pedals
- Ecological Washdown System
- Feeder Sensor (mechanical or sonic)
- Friction Steering
- Hard Top Canopy
- HID Lights
- Leveling Devices
- Lights (Working or Roding)
- Smooth/treadbar belt
- Oscillating Push Roller
- Power Folding Front Apron
- Power Mainframe Extensions
- Product Link
- Screed Extensions
- Tow-point Indicators (Upper)
- Track Plow
- Truck Hitch
- Umbrella
- Up-time Kit
- Warning Beacon
- Wide Width Paving Packages
- Windshield w/Hard Top Canopy

### Electrical System

Starting and Charging	24-volt, 115-amp alternator
Batteries	Two, 1000 CCA
Generator/Auxiliary Power	70 kW/ 6.6 kW
Machine Security System	Wire-ready
Product Link System	Wire-ready

### Capacities

Maximum throughput capacity	1300 tonnes/h	1,433 tph
Hopper capacity with tunnels	7.1 m <sup>3</sup>	250 ft <sup>3</sup>
Fuel tank	278 L	73 gal
DEF (Urea) capacity - Cat 4.4 engine only	19.1 L	5 gal
Engine oil - Cat 4.4 ACERT engine	13.5 L	3.6 gal
	Cat 7.1 engine	15.5 L
Cooling system - Cat C4.4 ACERT engine	31 L	8 gal
	Cat 7.1 engine	37 L
Hydraulic tank	219 L	58 gal

### Screed Specifications

Standard paving range:		
w/SE50 V, VT	2.55 - 5.0 m	8' 4"-16' 4"
w/SE60 V, SE60 V XW, SE60 VT XW	3.0 - 6.0 m	9' 10" - 19' 6"
Maximum paving width:		
w/SE50 V	6.5 m	21' 4"
w/SE50 VT	8.0 m	26' 4"
w/SE60 V	7.65 m	25'
w/SE60 V XW, SE60 VT XW	10.0 m	33'
Maximum paving depth	305 mm	12"
Extender height range	-20 mm to +50 mm	
Crown range:		
SE50 V, SE60 V	-4% to +10% (total)	
SE60 V XW	-3% to +10% (total)	
SE50 VT	-2% to +5% (per side)	
SE60 VT XW	-2% to +5% (per side)	
Extender slope range:		
SE50 V, SE60 V XW	-3% to +10%	
SE60 V,	-4% to +10%	
SE50 VT	-3% to +2%	
SE60 VT XW	-3% to +5%	

Materials and specifications are subject to change without notice.

Featured machines in photos may include additional equipment.

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

©2015 Caterpillar Inc.

All Rights Reserved.

CAT, CATERPILLAR, BUILT FOR IT, ACERT, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "PowerEdge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Product ID: AP655F

QEHQ1857-03 (9-2015)

