

*Advantage*<sup>TM</sup>

# Series Bottom Dump

Switch Gate Bottom Dump



Bottom Dump Trains

Quad Axle Bottom Dump





## Specifications\*

Model	BD22-402	BD22-362	BD22-403	BD22-433
Capacity	22 cu. yds.	22 cu. yds.	22 cu. yds.	22 cu. yds.
Overall length	39'10"	36'10"	39'10"	42'10"
Overall height	9'2"	9'2"	9'2"	9'2"
Overall width	102"	102"	102"	102"
KP to center last axle	36'	32'	36'	39'
Empty weight	12,600 lbs.	12,200 lbs.	14,600 lbs.	14,900 lbs.

## Standard Equipment

- 22 cu. yd. hopper.
- 16 - 1/2" air brakes.
- 8.25 x 22.5 steel disc wheels (hub piloted).
- 11R 22.5 steel disc wheels (F).
- Oil seals.
- Multi-leaf spring suspension.
- 18" kingpin setting.
- Oscillating kingpin plate.
- 100,000/80,000 psi high yield steel unitized frame construction.
- 102" wide.
- Telescopic pin-type park stands.
- Bolt-on push block/bumper.
- Rubber-mounted sealed beam lights and sealed harness system.
- Mid-turn signal/clearance lights.
- 3rd tail light package.
- Electrical system per DOT regulations.
- 7-pole electrical socket.
- Red & white conspicuity markings.
- 8" air cylinders.
- Open/close gate control from cab-versa valve with handle.

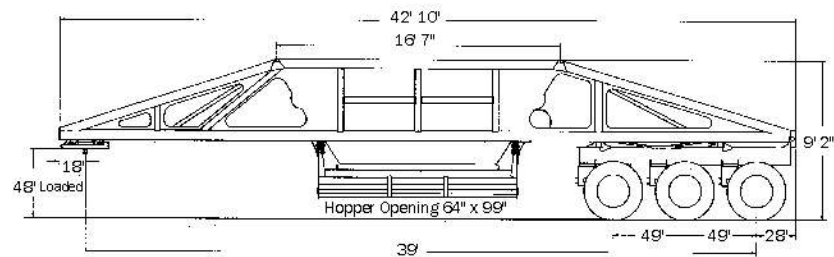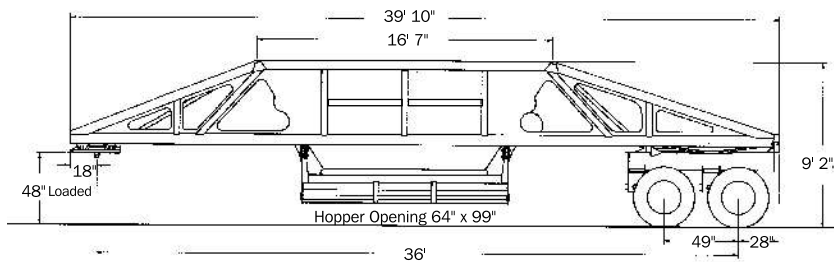

\*All specifications are subject to change without notice. Trailers pictured in this brochure may feature optional equipment.

Distributed By:



**TRAIL KING Industries**

*Advantage*<sup>TM</sup>  
SERIES